

# 5 ALUMINIUM FRAMED CEILING LED FOR CORRIDORS

## X-LINE LED

VERSATILE AND EFFICIENT LED FITTING  
FOR CORRIDORS AND CLASSROOMS


- A highly efficient LED fitting, designed for use in corridors or classrooms
- Constructed in the EU from aluminium profile with high quality Osram LED and opal diffuser
- Can be used as a stand-alone luminaire or linked together to give continuous light



A robust luminaire based on a simple aluminium profile that allows any number of lighting configurations thanks to a range of supplementary accessories including special links - which provide freedom in arranging the elements of your lighting system - suspensions and diffusers. X-LINE is equipped with an opal diffuser or MPRM and can be mounted either flush to the ceiling or as a pendant.


EXAMPLE PRICE:  
X-Line LED 2200 lumen  
574mm x 72mm

**£112.42**  
+ VAT  
Including delivery

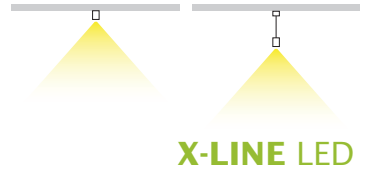

## X-LINE LED DIMENSIONS

X-LINE LED 4400 LM MICRO-PRM E24 840 / L-1200MM

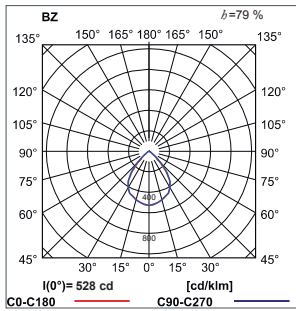


$C0 \alpha = 39^\circ$

h[m]	$\varnothing$ [m]	$C90 \alpha = 40^\circ$	$E_{AV}$ [lux]
1	1,61		1664
2	3,23		416
3	4,85		184
4	6,47		104
5	8,09		66



See over for specification


# 5 ALUMINIUM FRAMED CEILING LED FOR CORRIDORS

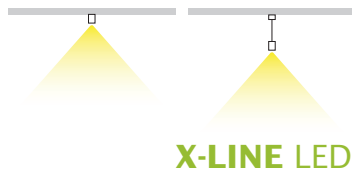

**X-LINE LED**

## X-LINE LED

### DIMENSIONS

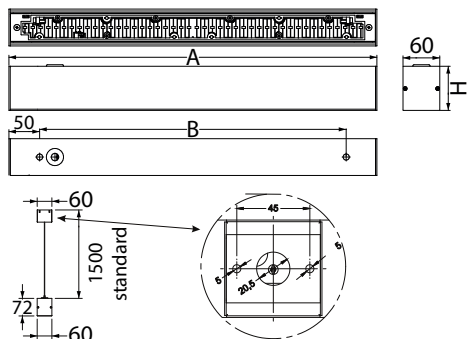

$\Phi$ [lm]	A (mm)	B (mm)	C (mm)
1300	574	504	72
2200	574	504	72
2600	1134	1028	72
4400	1134	1028	72
3250	1414	1308	72
5500	1414	1308	72
3900	1694	1588	72
6600	1694	1588	72
5200	2254	2148	72
8800	2254	2148	72



TYP	P(W)		$\Phi$ [lm]
X LINE LED	840/830		
X LINE LED	10 W	LED	1300
X LINE LED	17 W	LED	2200
X LINE LED	20/21 W	LED	2600
X LINE LED	33/34 W	LED	4400
X LINE LED	25/27 W	LED	3250
X LINE LED	42/44 W	LED	5500
X LINE LED	30/31 W	LED	3900
X LINE LED	50/51 W	LED	6600
X LINE LED	40/42 W	LED	5200
X LINE LED	67/68 W	LED	8800

Available colour of the light: 830/840

### LUMINAIRE OPTIONS

#### CONTROL GEAR


E	Driver
EDD	DM DALI driver

#### DIFFUSER

PLX	PMMA opal diffuser
Micro PRM	Micro prismatic diffuser

### WAY OF MOUNTING

1500mm long system of suspension length smooth regulation

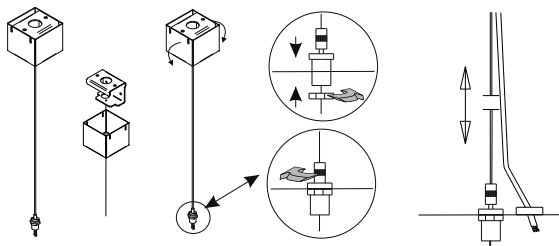


# 5 ALUMINIUM FRAMED CEILING LED FOR CORRIDORS



## X-LINE LED LINIA

### X-LINE LED LINEA

#### DIMENSIONS

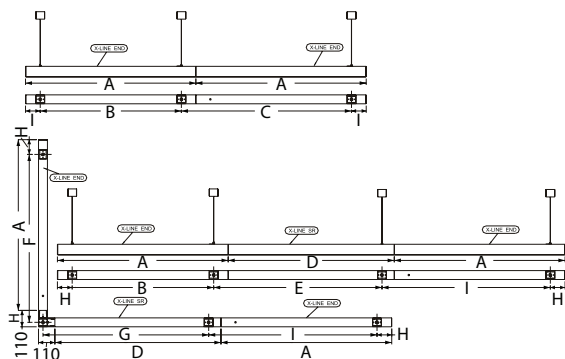

$\Phi$ [mm]	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
2200	569	504	564	564	564	614	614	35	534
2600	1129	1028	1124	1124	1124	1156	1156	53	1124
4400	1129	1028	1124	1124	1124	1156	1156	53	1124
3250	1409	1308	1404	1404	1404	1436	1436	53	1404
5500	1409	1308	1404	1404	1404	1436	1436	53	1404
3900	1689	1588	1684	1684	1684	1716	1716	53	1684
6600	1689	1588	1684	1684	1684	1716	1716	53	1684

TYP

PTW



$\Phi$  [lm]



	840/830		
X LINE LED LINIA S	17 W	LED	2200
X LINE LED LINIA EP	17 W	LED	2200
X LINE LED LINIA EL	17 W	LED	2200
X LINE LED LINIA S	20/21 W	LED	2600
X LINE LED LINIA EP	20/21 W	LED	2600
X LINE LED LINIA EL	20/21 W	LED	2600
X LINE LED LINIA S	33/34 W	LED	4400
X LINE LED LINIA EP	33/34 W	LED	4400
X LINE LED LINIA EL	33/34 W	LED	4400
X LINE LED LINIA S	25/27 W	LED	3250
X LINE LED LINIA EP	25/27 W	LED	3250
X LINE LED LINIA EL	25/27 W	LED	3250
X LINE LED LINIA S	42/44 W	LED	5500
X LINE LED LINIA EP	42/44 W	LED	5500
X LINE LED LINIA EL	42/44 W	LED	5500
X LINE LED LINIA S	30/31 W	LED	3900
X LINE LED LINIA EP	30/31 W	LED	3900
X LINE LED LINIA EL	30/31 W	LED	3900
X LINE LED LINIA S	51/51 W	LED	6600
X LINE LED LINIA EP	51/51 W	LED	6600
X LINE LED LINIA EL	51/51 W	LED	6600

Available colour of the light: 830/840



#### CONTROL GEAR

E Driver  
EDD DM DALI driver

#### DIFFUSER

PLX PMMA opal diffuser  
Micro PRM Micro prismatic diffuser

#### CONNECTORS

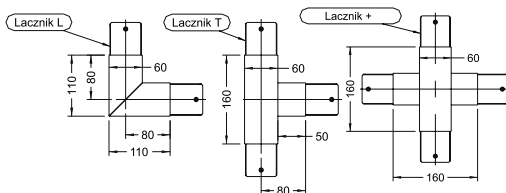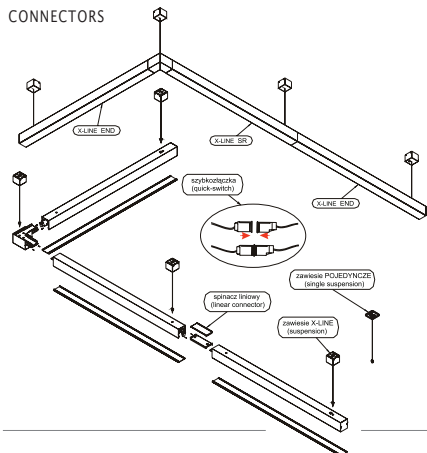


# 5 ALUMINIUM FRAMED CEILING LED FOR CORRIDORS



## X-LINE LED L-3000

### DIMENSIONS

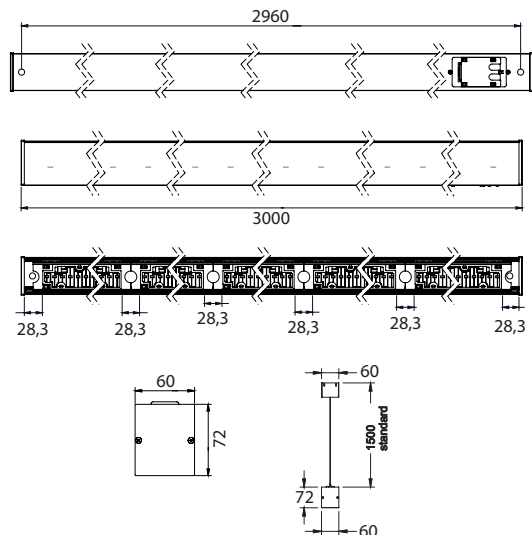

X LINE LED  
X LINE LED



840/830  
50/52 W  
84/86 W



LED  
LED



6500  
11000



Available colour of the light: 830/840

### LUMINAIRE OPTIONS

#### CONTROL GEAR


E Driver  
EDD DM DALI driver

#### DIFFUSER

PLX PMMA opal diffuser  
Micro PRM Micro prismatic diffuser

### WAY OF MOUNTING

1500mm long system of suspension length smooth regulation

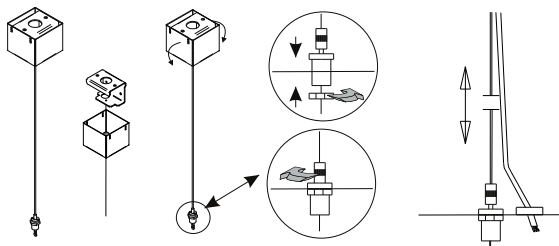



For more information about **X-LINE LED** call 01524 383000